


FEMALE TO FEMALE ADAPTER




BULKHEAD MOUNTING

MODEL	2208-*	2209A-*-1A	2209A-*-1B	2209A-*-1C
DIM A:	1.53	1.55	1.40	1.28
DIM B:	.88	.88	.85	.79
Max. Panel	.315	.315	.276	.217
NOTES	hermetic silver contact	gold plated contact	gold plated contact	gold plated contact

For 75 Ohms, insert -75 after basic part number. (Example: 2209A-7-1C-75)

FEMALE TO FEMALE ADAPTER

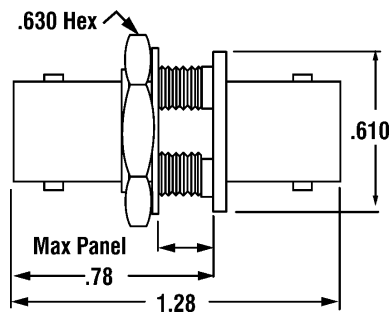


ISOLATED BULKHEAD MOUNTING

MODEL	2209AI-*-1C	2209AI-*-1A
Max. Panel	.217	.177
NOTES:	isolated from ground	isolated bushing

For 75 Ohms, insert -75 after basic part number. (Example: 2209A-7-1C-75)


MALE CAP

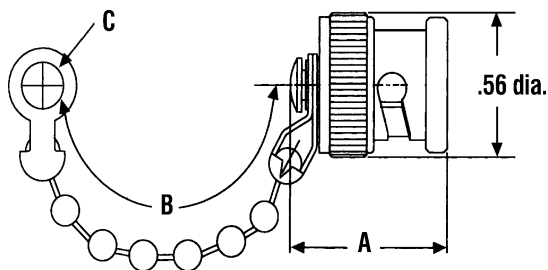

SHORTING AND DUST CAP

MODEL	2230-*	2230-*-C	2228-*	2228-*-C
DIM A:	.66	.55	.70	.58
DIM B:	2.25	—	2.25	—
DIM C:	.144	—	.144	—
NOTES	dust cap without bead chain	dust cap with bead chain	shorting cap without chain, silver plated contact	shorting cap with chain, silver plated contact

FEMALE CAP

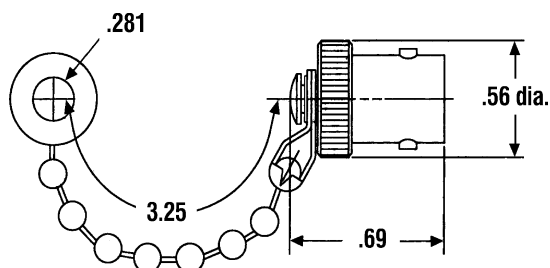

DUST CAP

MODEL	2230F-*	2113F-7
NOTES	with bead chain	without bead chain

NOTE: Female shorting caps are also available.

*-1 indicates gold plating, -4 indicates silver plating, -7 indicates nickel plating.