


### RIGHT ANGLE PLUG




### FOR FLEXIBLE, SEMI-RIGID OR ULTRA-FLEX CABLE

MODEL	4090-XX-*	4221-XX-*
NOTES	crimp type for flexible cable	direct solder for semi-rigid and Ultra-Flex cable
DIM.	A = .863	A = 0.67

Clamp style also available. Consult factory.

### FLANGE MOUNT JACK

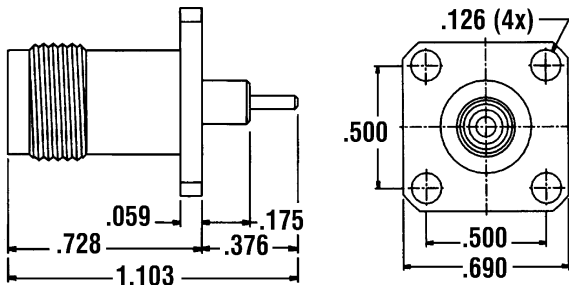

### RECEPTACLE

MODEL	4204-*	4204S-*
NOTES	.690 flange blunt post (shown)	.500 flange mtg. holes (4 pl.): .102 dia. on .34 centers blunt post (not shown)

Consult factory for other teflon lengths or contact types.

### FREQUENCY DC-15 GHz

### TNC PRECISION INTRA SERIES ADAPTERS

### VSWR 1.15 MAX

4000-9	4004-9	4006-9	4003-9
<b>RADIUS RIGHT ANGLE MALE TO FEMALE</b> 	<b>FEMALE TO FEMALE</b> 	<b>MALE TO MALE</b> 	<b>MALE TO FEMALE</b> 

### FREQUENCY DC-15GHz

### TNC STANDARD INTRA SERIES ADAPTERS

### VSWR=1.25 MAX

4208A-*	4209A-*	4087-*	4219-*
<b>FEMALE TO FEMALE HERMETIC BULKHEAD</b> <p>Non-hermetic version: 4209A-*</p>	<b>FEMALE TO FEMALE BULKHEAD</b> <p>Also available with isolated ground: 4209A-*-I (11 GHz) (Max. panel = .177)</p>	<b>FEMALE TO MALE TO FEMALE</b> 	<b>RIGHT ANGLE MALE TO FEMALE</b> 

SEE SPECIFICATION SHEET FOR PERFORMANCE, MATERIAL AND MOUNTING HOLE SIZE.

\* -1 indicates gold plating, -7 indicates nickel plating, -4 indicates silver plating,  
 -9 indicates passivated (stainless finish) except in areas where gold plating is required for solderability.  
 Additional adapters not shown are normally available from stock. Contact Coaxicom. For Reverse Polarized and "RP" to part number.